

# Ray Road Rip Rap Conversion

**Title:** Ray Road Rip Rap Conversion


**Cost:** \$14,595.40

**Description:** Removes Sod areas along Ray Road and replace with Rip Rap Also replace granite where needed.

**Location:** Ray Road

**Contracted Company:** BJ Landscaping

**Project Date:** September 2015

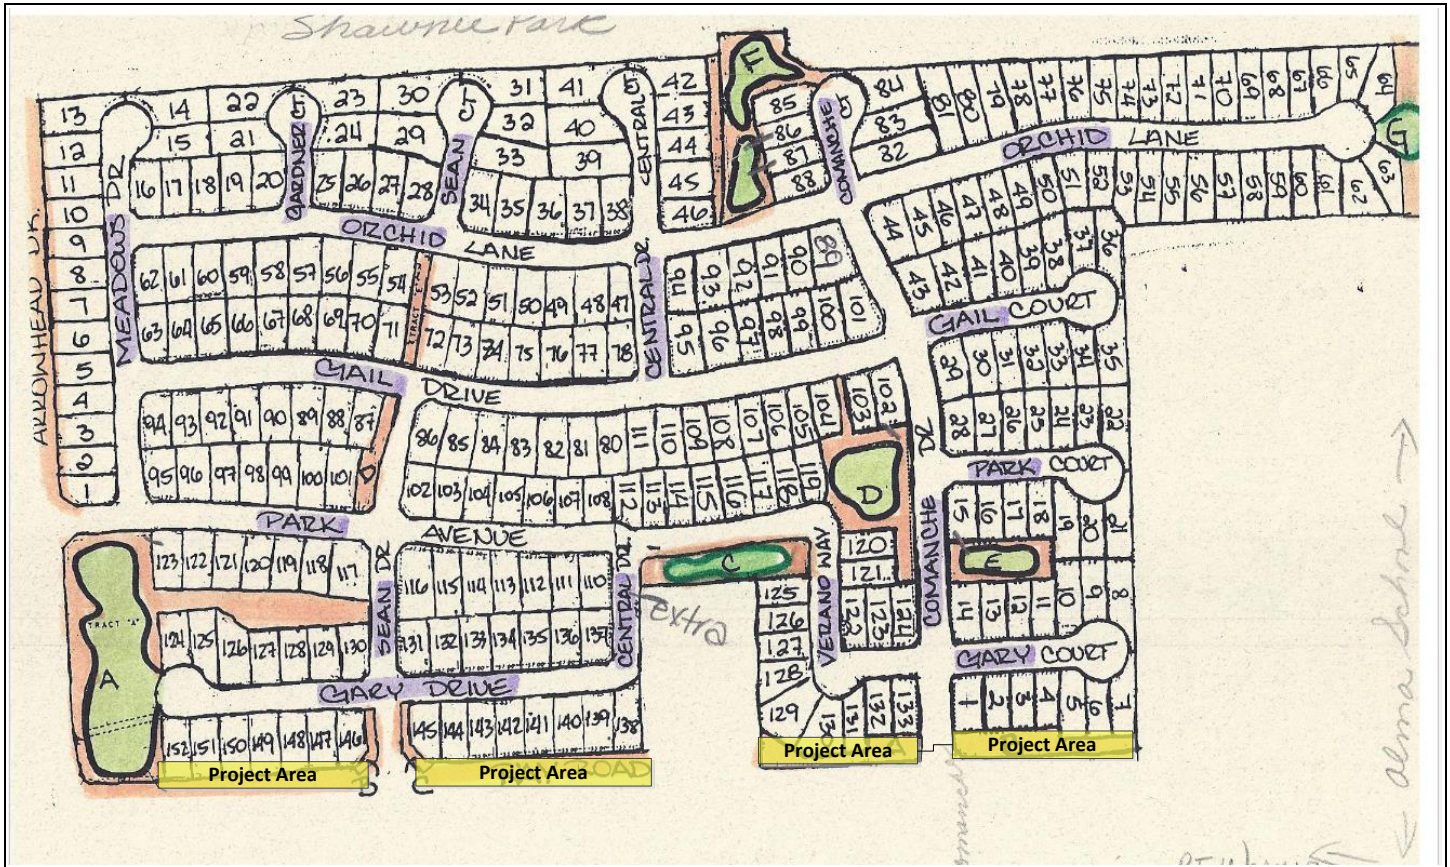



# Ray Road Rip Rap Conversion

## Before Pictures



## After Pictures





September 21, 2015

Festival Celebrations

**Re: Sod conversion to rip rap along Ray Rd**

BJ Landscape Maintenance is pleased to submit our pricing for the above referenced project.

1. Labor
2. Sod removal
3. Rip rap
4. Curb repairs
5. Erosion repair

**Total Price     \$14,595.40**

**BASIS OF PRICING:**

1. **Proposal to include removal of existing sprinkler systems in turf areas.**
2. **Removal of turf for proposed areas along Ray Rd.**
3. **Grade landscape areas for correct water flow.**
4. **Repair erosion areas where granite had slid into turf or drain areas**
5. **Move granite off curbing and turf areas. Granite is to be placed back into exiting granite areas to refresh bare spots, or where granite is thin.**
6. **Relocate river rock to expose existing curbing. This will refresh river rock spillways.**
7. **Placement of new 6"-8"14 rip rap (112) tons.**
8. **Repair and replace broken curb along Ray Rd, Area A (144), Area E (154), Area E (155), Area D (156), Area C (163), Area C (164), Area F (171), Area F (172), Area F (173), Area F (175) for a total of 170 feet of replaced curbing.**
9. **Clean debris from construction daily**
10. **This project is estimated to take 1 week to complete.**

If you have any questions or require further information regarding our proposal, do not hesitate to contact me at your convenience.

Sincerely,  
**BJ Landscape Maintenance**

*Andrew Roberts*

Andrew Roberts  
Operation Manager